DIGITUS® Multiple socket outlet with aluminum profile and switch, overvoltage protection, integrated mains filter, 5-way socket outlet with earthing contact, 2 m supply cable with earthing contact pl

DN-95433

EAN 4016032483595



1U Aluminum PDU, rackmountable, 5 x Safety outlet 16A,230VAC,50/60Hz,overvoltage,Net filter, Switch

The DIGITUS® power strips are the perfect solution for your network or server cabinet. In terms of power distribution, the PDU meets the requirements of many applications in IT, network technology, laboratories and the home. The power strip can be mounted in the 19" area of the cabinet in a space-saving 1U. An integrated mains filter and overvoltage protection protects the connected consumers from interference from the mains. Depending on the cabinet type, it is possible to mount the socket strip with the taps pointing to the right or left.

Safe and professional power supply in the 19" network / server rack area

- Illuminated switch - secured against unintentional switch-off
- Integrated mains filter
- Integrated overvoltage protection : Nominal
- Discharge current (In) - 10 kA
- Rotation of the cans: 45°
- Housing: Aluminum
- Plastic components made of ABS UL-94V-0
- Input: safety plug CEE 7/7, 230 Vac / 16 A
- Output: appliance sockets 5 x socket outlet with earthing contact DIN 49440, max. 16 A per output
- Supply cable: H05VV-F 3G 1.5 mm² , length: 2 m
- Rated voltage: 230-250 VAC, 50/60 Hz
- Dimensions: 482.6 (19") x 45 (1U) x 45 mm (HxWxD)

Attributes

- Additional Features: Power switch, Overvoltage protection, Line filter
- Current: 16 A
- Input Plug: CEE7/7
- Installation: Rack 1U
- Outlets: CEE 7/3
- Phase: 1ph
- Power: 3,6 kVA
- Volts: 230 V
- Inch form factor (IEC 60297): 482.6 mm (19")

Package contents


- Scope of delivery: 1 socket strip, 2 mounting brackets; 1 safety instructions


Logistics


	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	11.82	19.50	52.00	29.50	29,913.00
Packaging Unit Inside	1	1.18	5.80	9.70	51.00	2,869.26
Packaging Unit Single	1	1.18	9.70	51.00	5.80	2,869.26
Net single without Packaging	1	0.85	4.50	48.30	4.50	0.00

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:

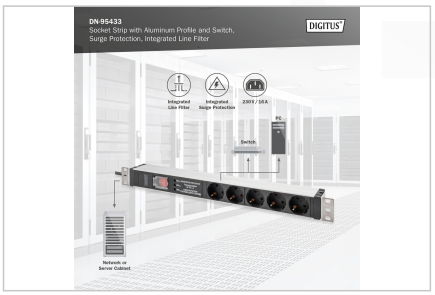

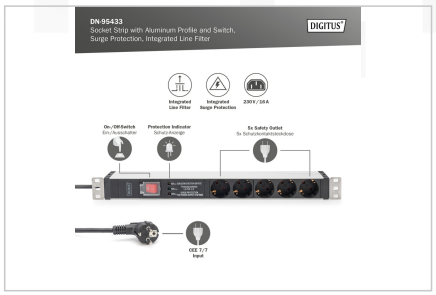

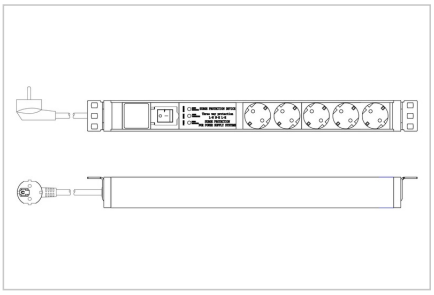







Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com