

R-H-0008-V03

REV.	LOCATION	DATE	DECRIPTION

LC/UPC -LC/UPC Patch Cord MM OM1 Duplex 2.0mm LSZH Orange

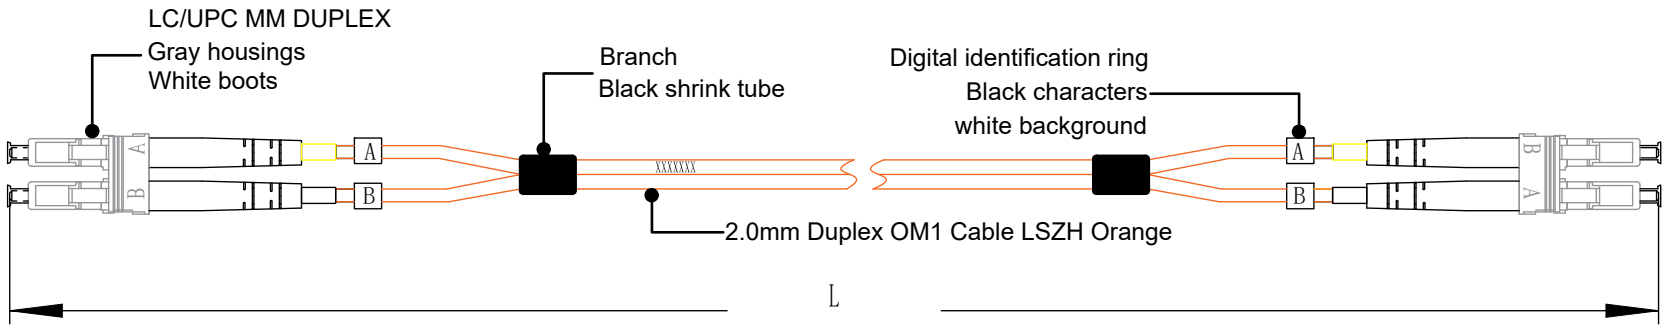

PART NO.	CABLE LENGTH
FL-LCLC-OM1-01M	1 Meter
FL-LCLC-OM1-02M	2 Meter
FL-LCLC-OM1-03M	3 Meter
FL-LCLC-OM1-04M	4 Meter
FL-LCLC-OM1-05M	5 Meter
FL-LCLC-OM1-06M	6 Meter
FL-LCLC-OM1-07M	7 Meter
FL-LCLC-OM1-08M	8 Meter
FL-LCLC-OM1-09M	9 Meter
FL-LCLC-OM1-10M	10 Meter
FL-LCLC-OM1-15M	15 Meter
FL-LCLC-OM1-20M	20 Meter
FL-LCLC-OM1-25M	25 Meter
FL-LCLC-OM1-30M	30 Meter

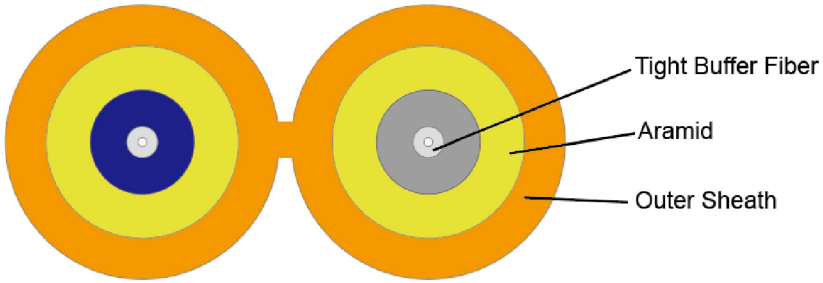

Cable Structure

Fiber Type	MM OM1
Attenuation Coefficient	850nm≤3.2dB/km
	1300nm≤1.2dB/km
Length Error	
L≤10m，ΔL(length error):0≤ΔL≤10cm	
L>10m，ΔL(length error):0≤ΔL≤1%*L	

Type		LC	LC	Optical Fiber Type	MM OM1
Specification		UPC	UPC	Optical Fiber Specification	62.5/125um
Performance	IL	≤0.30dB	≤0.30dB	Operating temperature(℃)	-25~+70
	RL	≥25dB	≥25dB	Storage temperature(℃)	-25~+70
Material		LSZH		Wavelength(nm)	850/1300
Colour		Orange		Diameter of cable(mm)	2.0*4.0

Unit	mm	Ver.	D1
Unit	1:1	Date	
Page	1/1	Drawing by	
Material:		Drawing by	
		Drawing by	

FluxLight Optical Transceivers

Build It Bigger. Build It Faster. Build It Sooner.

Phone: (888) 874-7574 | FAX: (866) 267-3045 | Email: sales@fluxlight.com | Website: www.fluxlight.com